




GLIDELOCK[®] Sliding Load-Securement Bracket

Sliding Load-Securement Bracket

Ancra presents GlideLock, an efficient and economical way to meet the latest Federal Motor Carrier Safety Administration (FMCSA) standards for fleets operating flatbed trailers with either, trailer rails, double L track or standard C winch track.

As the name implies, it glides into any position along the trailer rail or winch track to ensure the correct pull-angle for securing the cargo, while keeping the strap inboard of the rub rails and fastened against coming loose as the standard requires. Once in place, it locks the winch straps in place for safe securement of the load. It works with any standard flat hook strap.

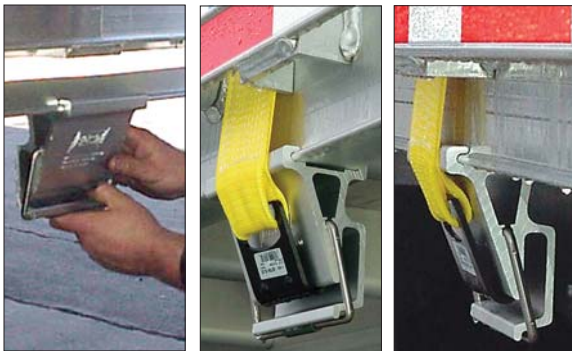

GlideLock is the economical way to bring your fleet into compliance.

- Allows adjustable anchor points for flat hook winch straps.
- Captures the flat hook on winch straps.
- Attaches to double L track (49242-10-120) or Ancra standard winch track (42357-11 or -21). See page 5 and 7 for slider winches and track.
- Meets new FMCSA standards for cargo securement regarding rub rails.
- 5,400 lbs. Working Load Limit, 16,200 lbs. Breaking Strength
- Corrosion resistant 6,000 series aluminum alloy T-6

GlideLock works in four easy steps.

1. Slide the unit onto the trailer rails or winch track.
2. Glide it to the correct position to insure a correct pull-angle.
3. Release the keeper to allow the flat hook to engage the GlideLock.
4. Secure the keeper to lock the flat hook in position. Once in place, the hook can't shift or come undone. Ideal for trailers equipped with trailer rails, double L track or standard C winch track and slider winches.

Part No. 49527-10 GlideLock for Double L Track

Breaking Strength: 16,200 lbs./7,348 kg.

Working Load Limit: 5,400 lbs./2,449 kg.

Weight: 4.50 lbs./2.04 kg.

Part No. 49527-13 GlideLock for Standard C Winch Track

Breaking Strength: 16,200 lbs./7,348 kg.



Working Load Limit: 5,400 lbs./2,449 kg.

Weight: 4.50 lbs./2.04 kg.

Coil Rack


Our coil racks are of one-piece construction for extra support, handling both heavy and light duty applications. Used with lumber blocks which provide extra cradling of the coils. Both have a black lacquer finish.

New D.O.T. standards specifically address securement of metal coils. If chocks are used, they must be held in place by coil bunks or racks to prevent them from coming loose.

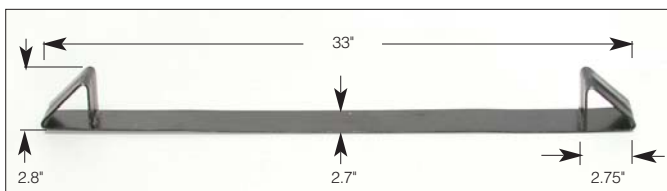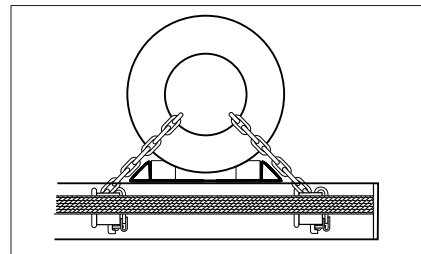

Light Duty

Part No. 49344-10 Weight: 5.7 lbs./2.60 kg., Metal Gauge: 10

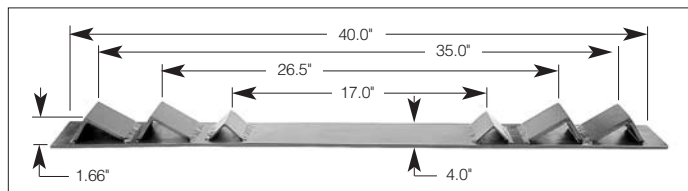

Heavy Duty 1/4" steel sheet per ASTM A36

Part No. 49344-12 Weight: 15.63 lbs./7.09 kg.




Along with our standard rugged flatbed products, Ancra web accessories offer high-performance and durability. Sturdy corner and web protectors prevent abrasion of cargo and cargo-securing straps. Tested and proven, our natural rubber rope and ties allow for quick and easy securement of tarps.


Corner Protectors



**2" Aluminum
6061-T6**
Part No. 41516-11
Weight: .63 lb./ .29 kg.



4" Plastic
Part No. 43986-10
Weight: .06 lb./ .03 kg.



**Steel Corner
Protector for Chain**
Part No. 49377-10
Weight: 1.26 lbs./ .58 kg.



3" Steel
Part No. 49577-10
Weight: .90 lb./ .41 kg.



4" Plastic
Part No. 49584-10
Weight: .47 lb./ .21 kg.



3" Rubber
Part No. 42098-11
Weight: .63 lb./ .29 kg.

4" Rubber
Part No. 42098-12
Weight: .75 lb./ .34 kg.

Web Protector



Part No. 40985-05-12
12-in. Cordura® Nylon sleeve for 2-in. webbing
Weight: .13 lb./ .06 kg.

Part No. 40985-05-RL
100-yd. bulk roll Cordura Nylon sleeve for 2-in. webbing
Weight: .39 lb./yd./ .18 kg./meter

Cordura® is a registered trademark of Dupont.

Ancra also offers Transmat® rebonded rubber friction mats for cargo securement. See page 33 for details.



Rubber Ties

WARNING: Rubber Ties have a strong spring force and if they become unhooked while under tension, they can snap back and cause injury. Safety glasses are recommended.



Part No. 41569-10 9-in. 10 lbs./4.55 kg.
Part No. 41569-15 15-in. 12 lbs./5.46 kg.
Part No. 41569-21 21-in. 15 lbs./6.82 kg.
Part No. 41569-31 31-in. 19 lbs./8.64 kg.
Part No. 41569-41 41-in. 23 lbs./10.46 kg.

- Quantity 50 per box
- Hooks are crimped to prevent loss

- Designed to hold tarp covers on trucks and trailers
- Not to be used to restrain or secure cargo
- Molded rubber construction for high ozone resistance and stretch resiliency
- **Stretches up to twice their length**
- **Use caution when using rubber ties**

Rubber Rope



Part No. 49454-10 3/8" Hollow Core
Part No. 49454-11 3/8" Solid Core
Part No. 49454-12 7/16" Hollow Core
Part No. 49454-13 7/16" Solid Core

- Standard 150-ft. coils
- Easily assembled to desired length for application.

Rubber Rope Hook



Part No. 49211-10
100 per pack
Weight: 5.2 lbs./2.37 kg.