




Cam Buckle Strap Assemblies

Combining Ancra's sturdy steel cam buckles with our cut-resistant webbing in lengths of 12, 16, and 20 feet, the Cam and Ratchet Buckle Strap Assemblies offer quick securement for light to medium loads. The standard fixed end length for all straps is 48". Built on a reputation for dependability and strength, these strap assemblies promise the quality that comes with every product that bears the Ancra name.



6,000 lb. Polyester Webbing (47200) with Cam Buckle 40880-19


Series E Strap Assembly

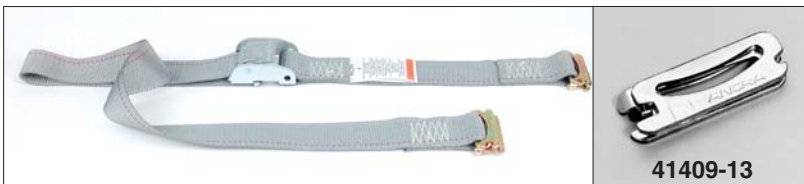

Series E Assembly with 3-piece end fitting

Assembly Breaking Strength Capacity: 2,500 lbs./1,136 kg.
Working Load Limit: 833 lbs./378 kg.

Part No.	Strap Length	Weight
40602-10	12 ft.	1.90 lbs.
40602-11	16 ft.	2.10 lbs.
40602-12	20 ft.	2.40 lbs.

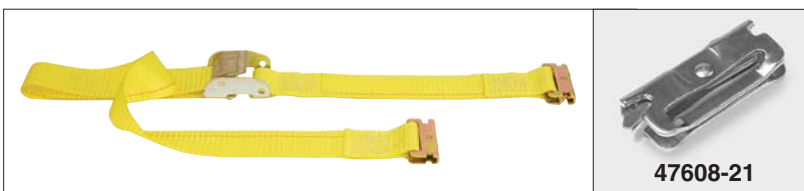

Series E Assembly with spring-actuated end fitting

Assembly Breaking Strength Capacity: 2,500 lbs./1,136 kg.
Working Load Limit: 833 lbs./378 kg.

Part No.	Length	Weight
40602-17	12 ft.	1.90 lbs.
40602-18	16 ft.	2.10 lbs.
40602-19	20 ft.	2.40 lbs.


Series F Strap Assembly



Assembly Breaking Strength Capacity: 1,500 lbs./681 kg.
Working Load Limit: 500 lbs./227 kg.

Part No.	Length	Weight
40602-20	12 ft.	1.70 lbs.
40602-21	16 ft.	1.90 lbs.
40602-22	20 ft.	2.20 lbs.

Slat Strap Assembly

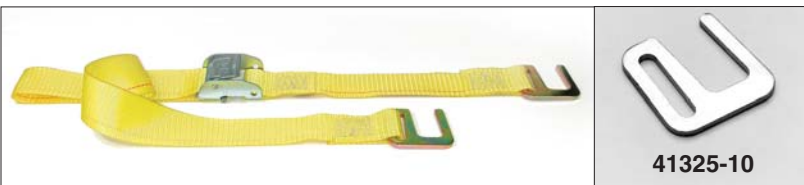

Assembly Breaking Strength Capacity: 2,500 lbs./1,136 kg.
Working Load Limit: 833 lbs./378 kg.

Part No.	Length	Weight
40602-23	12 ft.	1.80 lbs.
40602-24	16 ft.	2.00 lbs.
40602-25	20 ft.	2.30 lbs.

Electronic Straps



Assembly Breaking Strength Capacity: 2,500 lbs./1,136 kg.
Working Load Limit: 833 lbs./378 kg.

Part No.	Length	Weight
49025-20	12 ft.	2.20 lbs.
49025-21	16 ft.	2.40 lbs.
49025-22	20 ft.	2.70 lbs.

An additional E fitting allows for increased adjustability for various applications.

Please note: Ancra webbing comes in three colors, coded according to lengths. 12 ft. webbing is yellow, 16 ft. webbing is gray, 20 ft. webbing is blue. End fitting part numbers are shown for reference only.


IT IS THE OWNER'S AND USER'S RESPONSIBILITY TO DETERMINE SUITABILITY OF A PRODUCT FOR ANY PARTICULAR USE. REMEMBER, ALL STRAP ASSEMBLIES OR SYSTEMS ARE AS STRONG AS THEIR WEAKEST COMPONENT INCLUDING THE POINT OF ATTACHMENT.



Ratchet Buckle Straps

Series E Ratchet Buckle Strap w/ Spring End Fitting

Features heavy-duty 6,000 lb. polyester webbing 47200 and standard handle ratchet buckle 44258-13 for durability and wear.

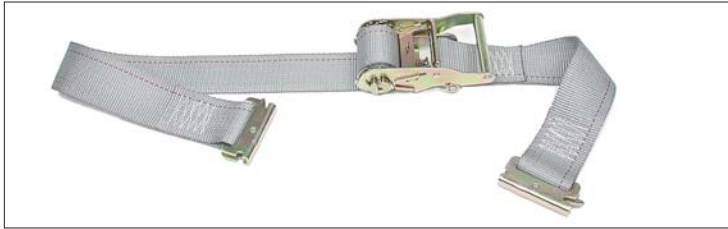


Breaking Strength: 3,000 lbs./1,363 kg.

Working Load Limit: 1,000 lbs./454 kg.

Part No.	Strap Length	Weight
48672-13	12 ft.	3.2 lbs.
48672-14	16 ft.	3.3 lbs.
48672-15	20 ft.	3.4 lbs.

Series E Heavy Duty

Heavy-duty 12,000 lb. yellow polyester webbing 41632-13 and standard handle ratchet buckle 44627-11 for durability and wear. All yellow straps.

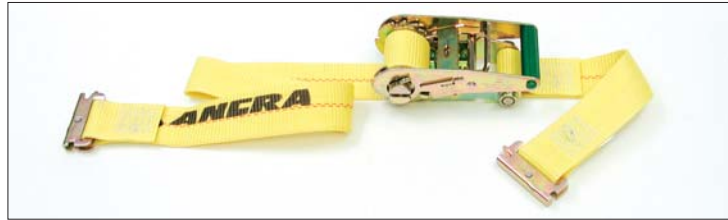

Breaking Strength: 3,000 lbs./1,363 kg.

Working Load Limit: 1,000 lbs./454 kg.

Part No.	Strap Length	Weight
49021-20	12 ft.	3.5 lbs.
49021-21	16 ft.	4.0 lbs.
49021-22	20 ft.	5.0 lbs.

Plate Trailer Straps

Breaking Strength: 2,500 lbs./ 1,136 kg. Working Load Limit: 830 lbs./ 376 kg.

Ratchet Buckle Strap w/ Wire Hook & Spring E Fitting





Part No.	Strap Length	Weight
48253-13	12 ft.	3.40 lbs.
48253-14	16 ft.	3.50 lbs.
48253-15	20 ft.	3.60 lbs.

Ratchet Buckle Strap w/ F Hook & Spring E Fitting



Part No.	Strap Length	Weight
48253-16	12 ft.	3.62 lbs.
48253-17	16 ft.	3.72 lbs.
48253-18	20 ft.	3.82 lbs.

Cam Buckle Strap w/ Wire Hook & Spring E Fitting

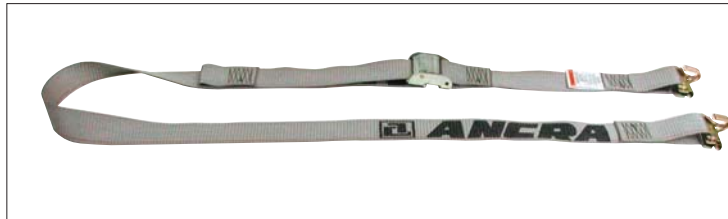

Part No.	Strap Length	Weight
48253-19	12 ft.	2.10 lbs.
48253-20	16 ft.	2.30 lbs.
48253-21	20 ft.	2.60 lbs.

Cam Buckle Strap w/ F Hook & Spring E Fitting




Part No.	Strap Length	Weight
48253-22	12ft.	2.32 lbs.
48253-23	16 ft.	2.52 lbs.
48253-24	20 ft.	2.82 lbs.



Torque Limiting Ratchet Assemblies

Damaged logistic track or buckled trailer sidewalls are a thing of the past with Ancra's Torque Limiting Ratchet Assemblies. A patented ratchet mechanism limits strap tension to 300 lbs.—enough to secure the load, but not enough to cause damage from over tightening. Assemblies are available with Low Profile (49715-10) or Heavy Duty (49410-12) long handle buckles. Strap lengths available from 12 to 20 feet to meet your specific requirements.

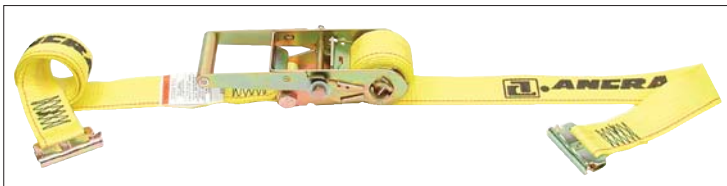

Breaking Strength: 3,000 lbs./1,363 kg.

Working Load Limit: 1,000 lbs./454 kg.

Series E Low Profile Buckle Strap w/Spring E Fitting (Not shown)

Part No.	Strap Length	Weight	Webbing Polyester
48672-33	12 ft.	4.00 lbs.	4,500 lbs.
48672-34	16 ft.	4.10 lbs.	4,500 lbs.
48672-35	20 ft.	4.20 lbs.	4,500 lbs.

Series E Heavy Duty Buckle Strap w/Spring E Fitting

49021-30	12 ft.	4.50 lbs.	12,000 lbs.
49021-31	16 ft.	5.00 lbs.	12,000 lbs.
49021-32	20 ft.	5.50 lbs.	12,000 lbs.

General Purpose Strap


Tiedown strap of strong 6,000 lb., 2" webbing 47200-62. Complete with Roller Buckle 41645-10 in three standard lengths. All blue straps.



Breaking Strength: 3,000 lbs./1,363 kg. (Loop load)

Working Load Limit: 1,000 lbs./454 kg. (Loop load)

Part No.	Strap Length	Weight
41643-10	12 ft.	.85 lbs.
41643-11	15 ft.	1.00 lbs.
41643-12	21 ft.	1.30 lbs.

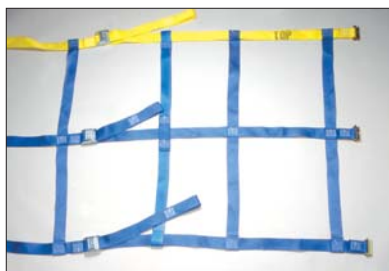

Custom Nets

Ancra custom solutions promise quality and performance.

Designed for your particular van application, Ancra custom nets offer retention support for various sized and shaped packages. Using strong 1" or 2" webbing, they're individually tailored to fit your van and loading condition, assuring maximum effectiveness in transporting a load securely.

Interior van straps should be inserted in track 18- to 24-inches behind the front edge of the load and cinched tight.



Specialty Auto Tiedowns

Ocean Transport Strap



Designed specifically for the securement of automobiles in auto transport vessels, Ancra's Ocean Transport Strap incorporates a low-profile overcenter buckle and stamped steel hooks. The strap assembly has a breaking strength of 3,300 lbs./1,500 kg. and working load limit of 1,100 lbs./500 kg.

Part No. 44926-10 80 in. Strap

Weight: 2.10 lbs./95 kg.



Series E Transit Strap w/RTJ Hooks



Assembled with durable latex-treated polyester webbing (41632-13) and ratchet buckle (47105-11). Fixed end features a Series E & A Articulated Track Fitting (47772-12), and the adjustable end features a cluster hook (45515-10).


Part No. 49023-20 6-foot Strap

Part No. 49023-21 8-foot Strap

Part No. 49023-22 12-foot Strap

Strap Assembly Breaking Strength Capacity: 3,000 lbs./1,363 kg.
Working Load Limit: 1,000 lbs./454 kg.

Auto Tiedown Strap

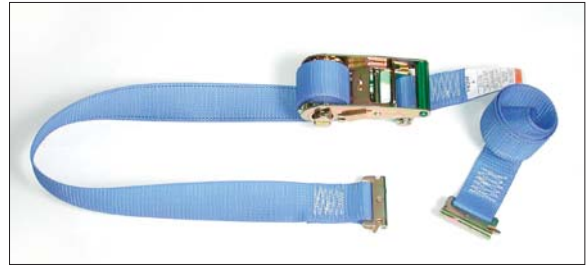

A simple, widely used method of auto transport for use in vans equipped with Series E or A Track. Made with Ratchet Buckle (44627-10), Spring E Fitting (47608-21) and Blue Polyester web (47200-62).

Part No. 48936-10 12 ft. RO/RO Strap, Series E

Strap Assembly Breaking Strength Capacity: 3,000 lbs./1,363 kg.

Working Load Limit: 1,000 lbs./454 kg.

Weight: 3.65 lbs./1.66 kg.

Tiedown w/ Snap Hooks



Ancra's tiedowns feature latex-treated polyester (41632-13) with ratchet buckle (47105-11) and snap hook (40084-14).

Strap Assembly Breaking Strength Capacity: 5,000 lbs./2,272 kg.
Working Load Limit: 1,666 lbs./757 kg.

Part No.	Strap Length	Weight
49020-20	6 ft.	3.80 lbs./1.73 kg.
49020-21	8 ft.	4.44 lbs./2.02 kg.
49020-22	12 ft.	4.84 lbs./2.20 kg.

Soft Tiedowns

Ancra designs and manufactures a complete line of wheel dolly straps for towing automobiles. Three of the more popular designs are shown here. Call us about your specific requirements.



For tires
7" W x 20" H

Basket Strap

Part No. 45143-20

Weight: 2.25 lbs./1.03 kg.



For tires
8" W x 22" H

Wheel Dolly Strap

Part No. 47934-11

Weight: 1.0 lbs./.46 kg.



For tires
10" W x 24" H

Wheel Dolly Strap

Part No. 47935-11

Weight: 1.50 lbs./.69 kg.